


100C8 Froet Drain® roof drain Submittal

The Froet Drain® bi-functional roof drain is to be used in any flat roof construction. All drain parts are cast iron with the exclusion of the overflow riser pipe which is steel. Connections are all no hub.

Installation Tips:

Extensions are presently not available for the 8" drain. The drain can be elevated from the DMP-Deck Mounting Plate to accommodate thicker insulation. Make note of drain dimensions. Froet Industries recommends that a sump be created with the insulation to promote flow and prevent ponding due to the height of the drain ring. Any ponding at the roof drain is likely to increase the frequency of the drain strainer becoming obstructed with debris. The roofing contractor needs to install roofing membrane so as to not obstruct the primary sump area

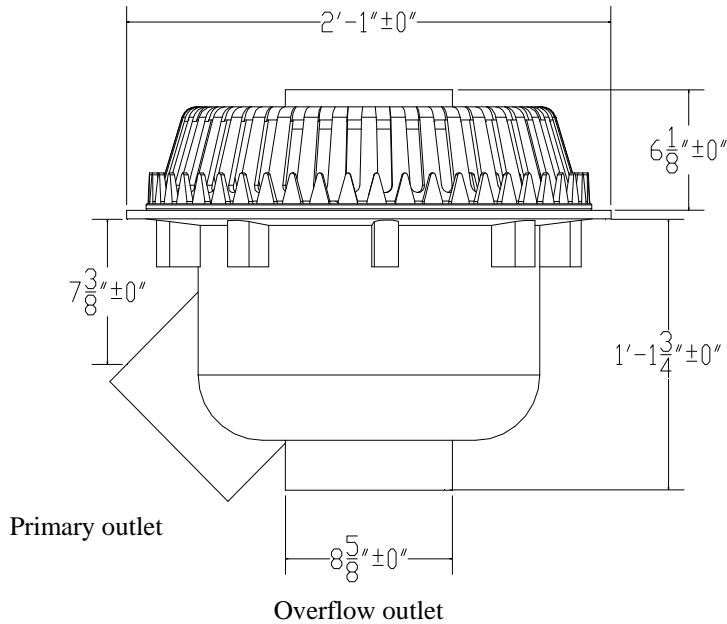

Standard roof drain supplied with 5 inch high primary strainer and 6 inch high overflow.

Low Profile roof drain supplied with 3 inch high primary strainer and 4 inch high overflow.

Project Options

	LP	Low Profile
	OFS	Overflow Strainer
	DC	Deck Clamp
	DP	Drain Pan
	DMP	Deck Mounting Plate
	VP	Vent Pipe

Please note: Overflow strainer not included with base drain. The OFS designation must be in part number to include overflow strainer

Project name: _____
 Contractor: _____
 Gen Cont: _____
 Design Firm: _____

Froet Industries LLC 1741 Industrial Drive
 Sterling Illinois 61081
 ph. 815.626.7922 fx. 815.626.0702
 www.froetindustries.com