


## 100C3 Froet Drain® roof drain Submittal

The Froet Drain® bi-functional roof drain is to be used in any flat roof construction. All drain parts are cast iron with the exclusion of the overflow riser pipe which is steel. Connections are all no hub.

### Installation Tips:

The extensions are to be used to provide clearance of the primary outlet when used with thicker decks and/or thicker insulations. Froet Industries recommends that a sump be created with the insulation to promote flow and prevent ponding due to the height of the drain ring. Any ponding at the roof drain is likely to increase the frequency of the drain strainer becoming obstructed with debris. The roofing contractor needs to install roofing membrane so as to not obstruct the primary sump area

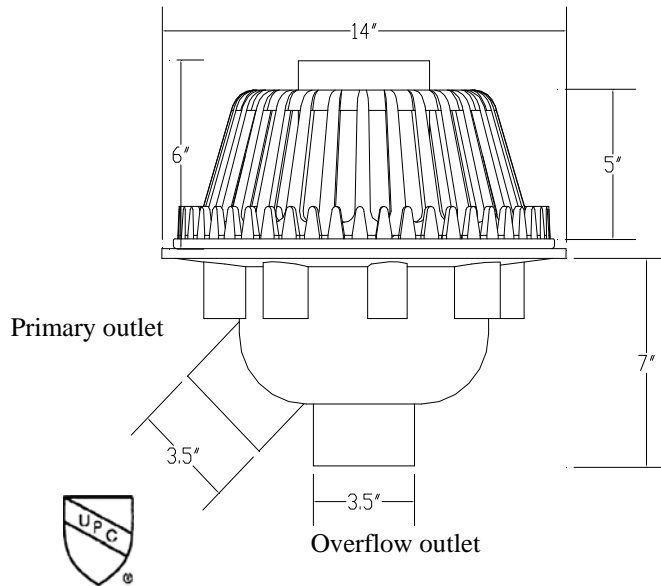

**Standard** roof drain supplied with 5 inch high primary strainer and 6 inch high overflow.

**Low Profile** roof drain supplied with 3 inch high primary strainer and 4 inch high overflow.

### Project Options

LP	Low Profile	DEX-2	2" Extension
DC	Deck Clamp	DEX-4	4" Extension
OFS	Overflow strainer	DEX-6	6" Extension
LPOFS	Low profile Overflow Strainer	IG	IRMA Guard
DP	Drain Pan	CFW	Control Flow Weir
DMP	Deck Mounting Plate	VP	Vent Pipe
SP	Sump Pan	ER-1.5	Elevation Ring for 1.5" Insul
FR	Finishing Ring	ER-2	Elevation Ring for 2" Insul

Project name: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Gen Cont: \_\_\_\_\_  
 Design Firm: \_\_\_\_\_

**Please note:** Overflow strainer not included with base drain. The OFS designation must be in part number to include overflow strainer

**Froet Industries LLC** 1741 Industrial Drive  
 Sterling Illinois 61081  
 ph. 815.626.7922 fx. 815.626.0702  
 www.froetindustries.com

Specifications and dimensions subject to change without notice