


## Froet Adjustable GRB

### Installation Tips:

The Froet GRB is made from black HDPE which highly resistant to moisture and fertilizer. It is also easily adjustable with a saws-all. The lower corrugated section can be cut in 2 5/8" increments and the top can be cut to fine tune the height to project requirements. The top comes standard with solid HDPE. Perforated top is available for drainage. It is recommended if the GRB's are going to be in a walkway area of a green roof that the corrugated section be double wall and the optional fiberglass cover be used. Inlets can be provided for drainage pipe from other areas. A media sock can be provided to prevent dirt and green roof media from entering the GRB. A S/S rock barrier is available to recess the top under a gravel surface.

### PLEASE NOTE: GRB

Flange must sit on drainage mat. This GRB will fit 2" thru 6" drains only, S/S GRB must be used for 8" drain.

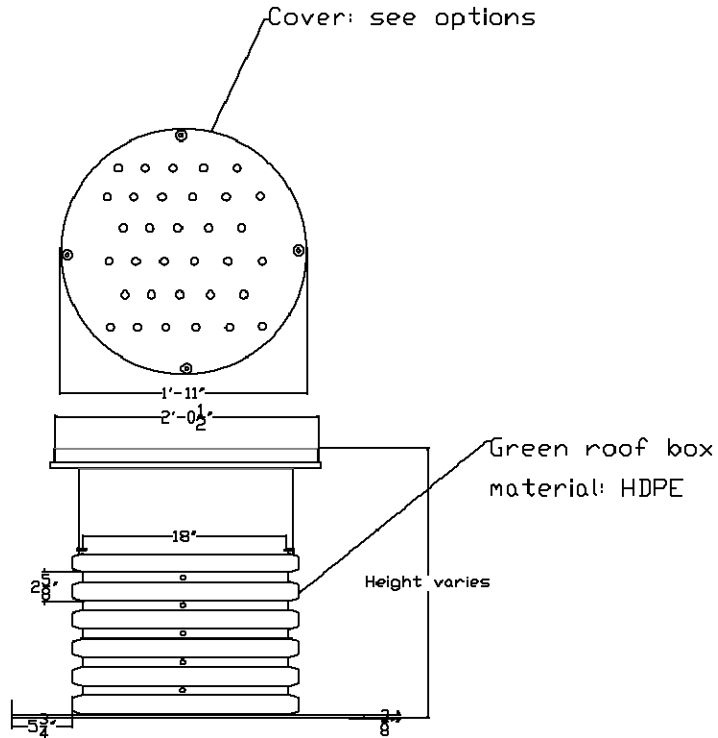

### Project Options

### Quantity :

SW	Single wall Corrugated	SB	Stainless steel rock barrier
DW	Double wall Corrugated	MS	Media Sock
SH	Single height 14" overall	SI	Side inlets
DH	Double height 24" overall	PT	Perforated top HDPE
TH	Triple Height 36" overall	FT	2000lbs F/G top for foot traffic
QH	Quad Height 48" overall	HPGT	Heal Proof Grate Aluminum

Project name: \_\_\_\_\_

Contractor: \_\_\_\_\_

Approval: \_\_\_\_\_ Date \_\_\_\_\_

Gen Con: \_\_\_\_\_

Design Firm: \_\_\_\_\_

**Froet Industries LLC** 1741 Industrial Drive  
Sterling Illinois 61081  
ph. 815.626.7922 fx. 815.626.0702  
www.froetindustries.com

Specifications and dimensions subject to change without notice