


## 200C(5,6,8)LD Primary Roof Drain Submittal

The Froet primary LD drain is used when overflow protection is handled by thru wall scuppers gravel stop or a separate overflow drain. Our lite drainage drain is based on the industry's common practice of making different size drains with one size body. This practice restricts flow so we recommend that these drains only be used when the like size pipe is used based on 1/8" per foot slope flow rating. Like all of our drains these are all cast iron with powder coat finish, there are no cheap plastic domes available .

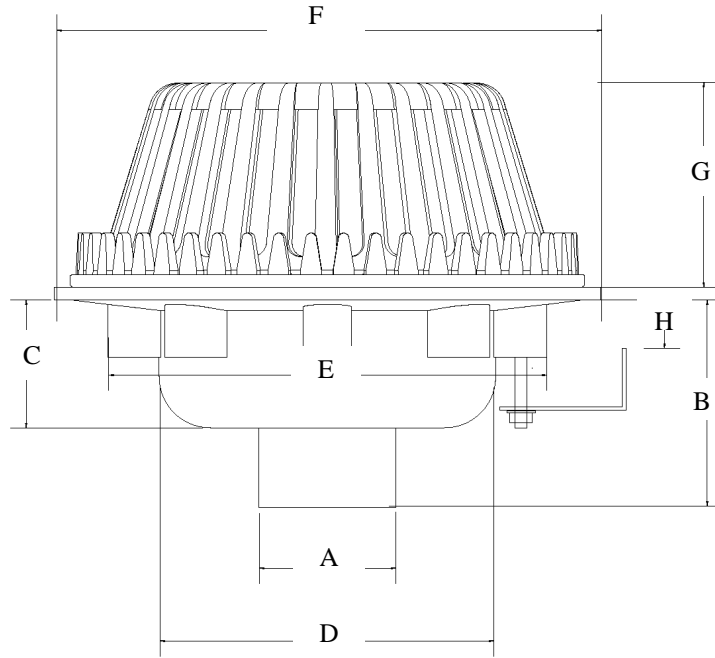

A-size	B-Overall Depth	C-Sump Depth	D-Sump OD	E-Boss OD	F-Diameter	G-Strainer	H-Deck Clamp MIN	Free Area SQ IN
5" (5.5" OD)	6.11"	4.50"	8.62"	11.25"	14"	5.23	none	93.3
6" (6.5" OD)	6.11"	4.26"	8.62"	11.25"	14"	5.23	none	93.3
8" (8.5 OD)	6.00"	6.00"	8.62"	11.25"	14"	5.23	none	93.3

### Project Options

DC	Deck Clamp
ADC	Alternate Deck Clamp
DP	Drain Pan
DMP	Deck Mounting Plate
SP	Sumped Pan
DEX-2	2" Extension
DEX-4	4" Extension
DEX-6	6" Extension
FR	Finishing Ring
IG	IRMA Guard
CFW	Control Flow Weir
WD2	2" High Overflow Water Dam
VSS	Vandal Secure strainer

Project name: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Gen Cont.: \_\_\_\_\_  
 Design Firm: \_\_\_\_\_

**Froet Industries LLC** 1741 Industrial Drive  
 Sterling Illinois 61081  
 ph. 815.626.7922 fx. 815.626.0702  
 www.froetindustries.com

Specifications and dimensions subject to change without notice